


# ABUS wall jib cranes

**Load capacity: up to 0.5 t**  
**Jib length: up to 7 m**  
 (depending on load capacity)

## ABUS LWX wall jib crane

- smooth-running jib for easy manual operation
- optimal highest hook position
- optional electric trolley travel

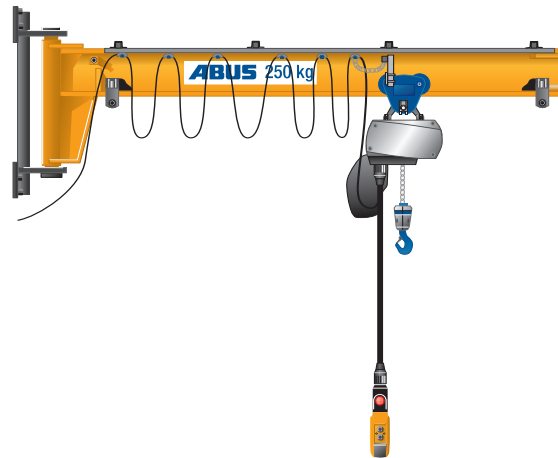


Nominal slewing range  
 up to 180°

**Load capacity: up to 1 t**  
**Jib length: up to 7 m**  
 (depending on load capacity)

## ABUS LW wall jib crane

- relatively light weight;  
 can also be installed in light-weight buildings
- trolley very easy to move by hand

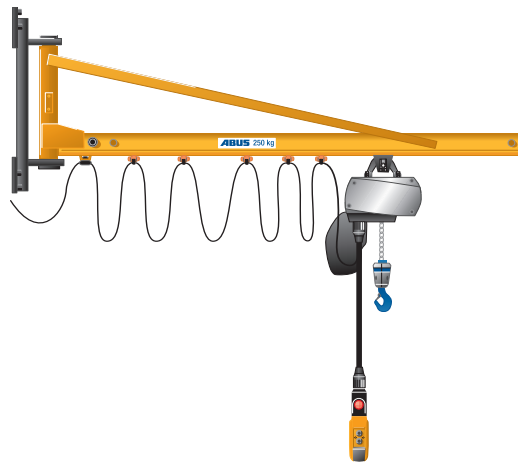


Nominal slewing range  
 up to 180°

**Load capacity: up to 5 t**  
 (> 4 t with ABUS wire rope hoist)  
**Jib length: up to 10 m**  
 (depending on load capacity)

## ABUS VW wall jib crane

- low headroom offers optimal highest hook position
- optional electric slewing gear
- optional electric trolley travel
- optional mobile control  
 (standard with wire rope hoists)

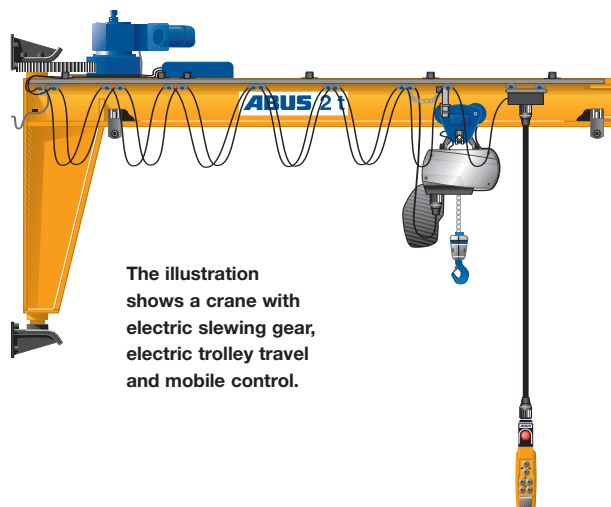

The illustration shows a crane with electric slewing gear, electric trolley travel and mobile control.

Nominal slewing range  
 up to 180°