


ABUS ESB monorail

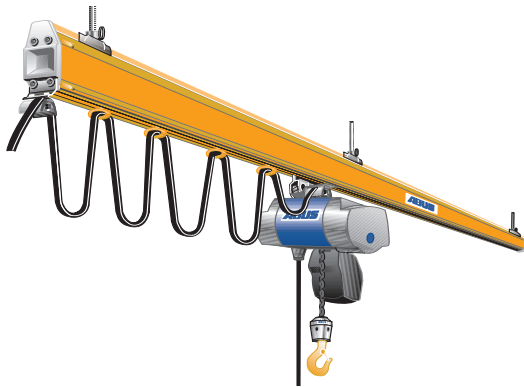


for linear point-to-point coverage

Load capacity: up to 2 t

- curves are possible on the track
- low headroom
- wide suspension spacing
- optional electric hoist travel

ABUS ZSB double-rail system

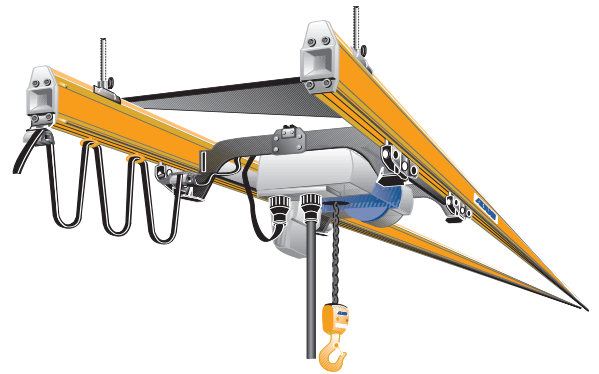

for linear point-to-point coverage

Load capacity: up to 2 t

- wide suspension spacing
- chain hoist installed between rails for improved lift height
- optional electric hoist travel
- optional mobile control

ABUS EHB single-girder crane



for area coverage

Load capacity: up to 1 t

Crane girder length: up to 10 m (depending on load capacity)

- very light crane; ideal for use in lightweight buildings
- easy to move manually
- low headroom
- short end approach dimensions
- wide suspension spacing

ABUS EHB-X stooled up single girder crane



for area coverage

Load capacity: up to 1 t

Crane girder length: up to 8 m (depending on load capacity)

- stooled up crane for optimum use of available space
- easy to move manually
- ultra low headroom
- short end approach dimensions
- wide suspension spacing
- optional electric long + cross travel
- optional mobile control