


ABUS pillar jib cranes

Nominal slewing range
up to 270°

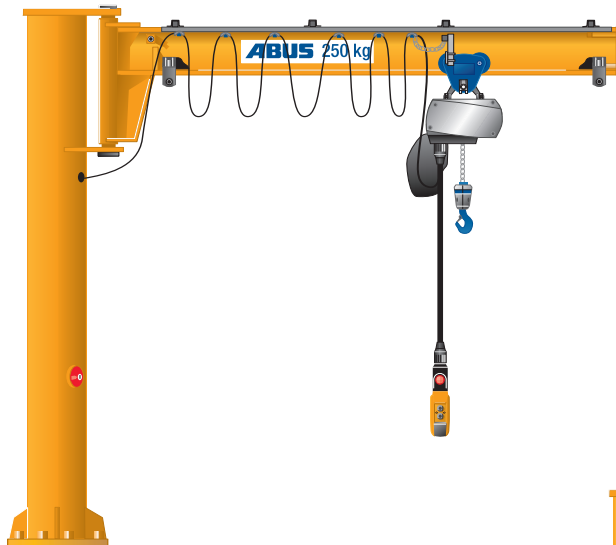

Load capacity: up to 0.5 t
Jib length: up to 7 m
(depending on load capacity)


ABUS LSX pillar jib crane

- smooth-running jib for easy manual operation
- optimal highest hook position
- optional electric hoist travel

Load capacity: up to 1 t
Jib length: up to 7 m
(depending on load capacity)


ABUS LS pillar jib crane

- light self weight; can be installed even if floor or foundation conditions are difficult
- almost effortless push trolley travel

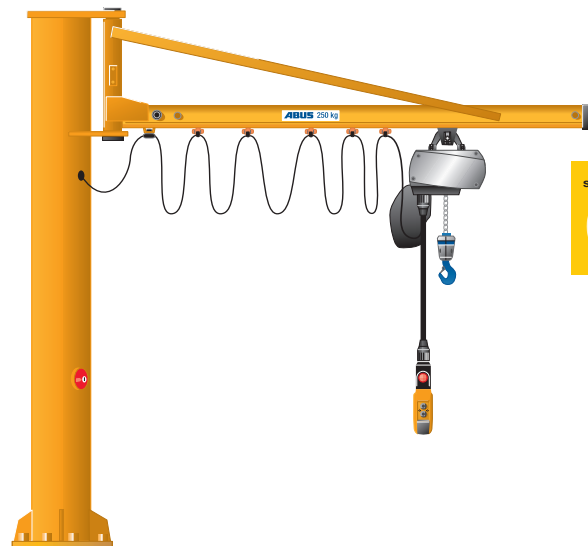

Nominal slewing range
up to 270°

Nominal slewing range
infinite 360°

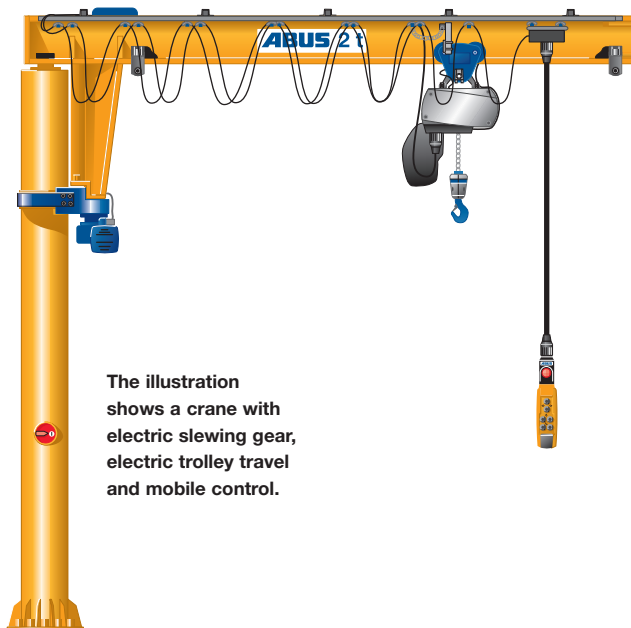

The illustration shows a crane with electric slewing gear, electric trolley travel and mobile control.

Load capacity: up to 6.3 t
(> 4 t with ABUS wire rope hoist)
Jib length: up to 10 m
(depending on load capacity)

ABUS VS pillar jib crane

- low headroom offers optimal highest hook position
- optional electric slewing gear
- optional electric hoist travel
- optional mobile control (standard with wire rope hoists)